


RoHS
Compliance

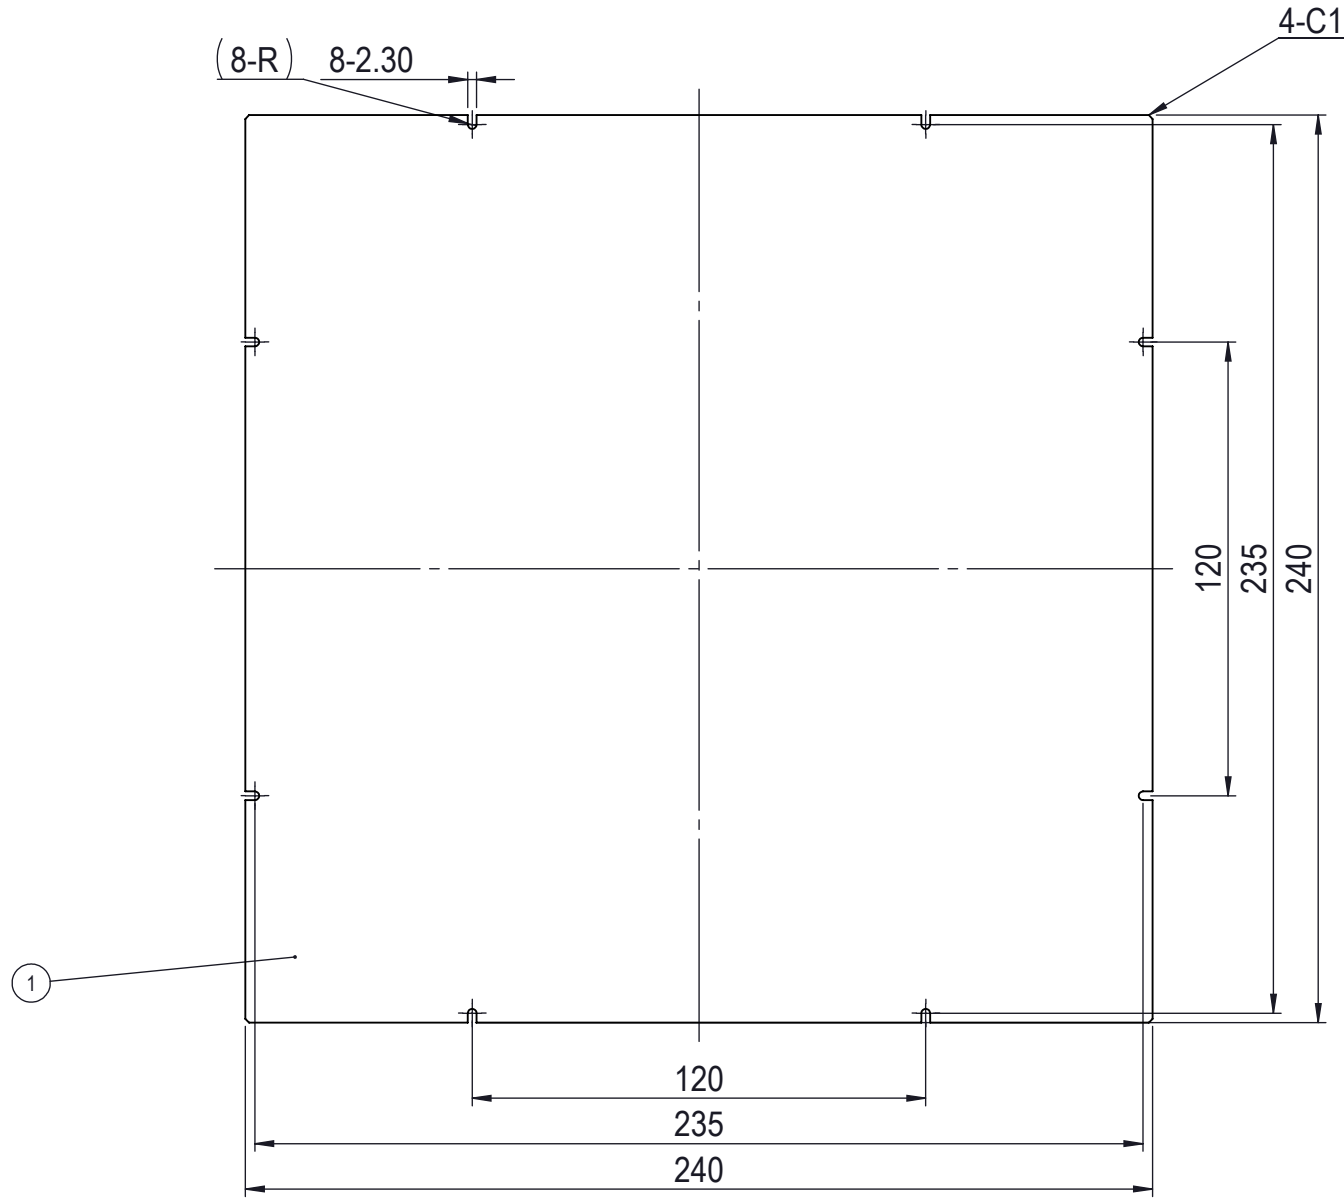

Louver Direction

t=0.6mm

LENGTH OF SHORT ONE ON THE BANK			
L ≤ 10	10 < L ≤ 50	50 < L ≤ 120	120 < L ≤ 400
±1°	±30'	±20'	±10'
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

CLASS OF MEASURE			
L < 0.5	0.5 ≤ L ≤ 3	3 < L ≤ 6	6 < L
±0.2	±0.5	±1.0	±1.0
TOL. A	TOL. B		

ORIGINAL SIZE-A-3

NO	PART DESCRIPTION	MODEL NUMBER	QTY	NOTE
2	Pan Head Screw			
1	Light Control Plate			

DESIGNED	DRAWN	CHECKED	APPROVED
Jacky Wang	Jacky Wang	Yong Peng	Jonathan Li

FINISH	UNIT : mm	
SURFACE ROUGHNESS	MODEL NAME	
MATERIAL	CV-LC-FL-230X230	
CHAMFER	PART NAME	
TOLERANCE	OUTLINE DRAWING	
SCALE 1:2	DRAWING NO.	REV A00
		SHT 1/1